


F150

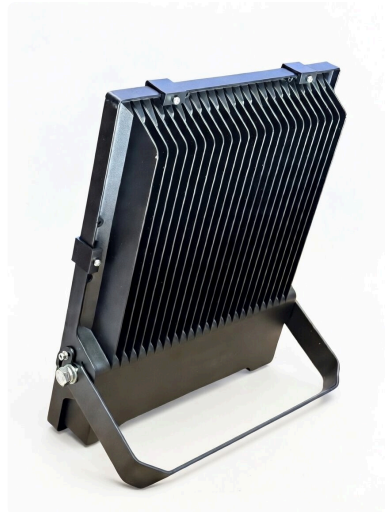

PRODUCT NAME

F150

CODE

F150P-150W-840-M3

DESCRIPTION

Proiettore per grandi aree, nato per illuminare aree sportive professionali, dotato di valvola anticondensa, pressacavo in ottone, vetro temperato e efficienza luminosa al top della categoria

KEY FEATURES

- Efficienza al top della categoria
- Lenti in PMMA ad alta efficienza
- Regolazione a scala gradi per precisione di puntamento
- Nato illuminare perfettamente campi da tennis, padel, calcio ecc.
- Corpo in alluminio presofuso

🏠 Via Marsala n. 34/A - 21013 Gallarate (VA)

🌐 mgelighting.com

✉ info@mgepower.com

In order to ensure the highest protection against electric shock, IP66 LIGHTING Srl reserves the right to make changes without notice. Luminous flux and electrical power are subject to a tolerance of +/- 10% with respect to the indicated value. Unless otherwise stated, values refer to an ambient temperature of 25°C.

TECHNICAL DATA SPECIFICATION

GENERAL INFORMATION

Lumen	25500	Light Source:	LED
Power [W]:	150	Connection:	Cable Joint
Optics:	Asymmetric	CCT [K°]:	4000K
Lamp body material:	Aluminium die casting	Color Rendering Index [CRI]	80
Optical material:	PMMA	Grado IK:	08
Weight:	4Kg	IP Rating:	66
Finish	Black color Powder painted	Gaskets:	Silicone foam

ELECTRICAL CHARACTERISTICS

Supply voltage [V AC]:	100-277	IEC protection class:	I
Power frequency [Hz]:	50/60	Power factor / COS φ:	0,95
Surge Common Mode [kV]:	10	Inrush current [A/μs]:	90

INSTALLATION

Application:	Outdoor	Max Temperature [C°]:	+50
Min Temperature [C°]:	-20		

CHARACTERISTICS OF LIGHT

MacAdam:	4	Maintaining flow:	LM80 B10 100.000
IPEA	/	Zero light pollution (ULR = 0%):	/

APPROVALS

Glow wire test	850°	Photobiological risk:	Exempt
CE Mark:	YES	EU RoHS Compliance:	YES

OPTIONAL

CODE	DESCRIPTION
-	-

