


F150

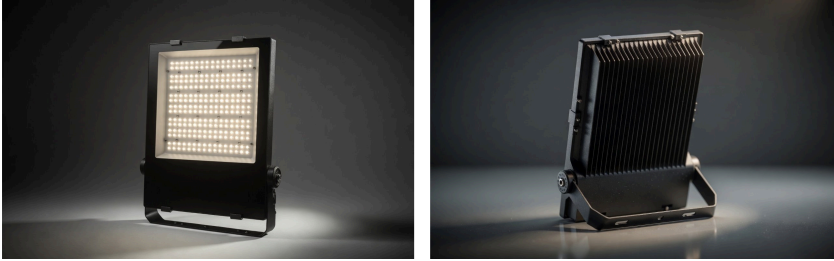

PRODUCT NAME

F150

CODE

F150P-240W-850-P50

DESCRIPTION

Proiettore per grandi aree, nato per illuminare aree sportive professionali, dotato di valvola anticondensa, pressacavo in ottone, vetro temperato e efficienza luminosa al top della categoria

KEY FEATURES

- Efficienza al top della categoria
- Lenti in PMMA ad alta efficienza
- Regolazione a scala gradi per precisione di puntamento
- Nato illuminare perfettamente campi da tennis, padel, calcio ecc.
- Corpo in alluminio presofuso
- Vetro Temperato di protezione
- Altissima protezione contro acqua IP66

TECHNICAL DATA SPECIFICATION

GENERAL INFORMATION

Lumen	40800	Light Source:	LED SMD 3030 ceramic base
Power [W]:	240	Connection:	Quick no need to open the device
Optics:	Asymmetrical 50°	CCT [K°]:	5000K
Lamp body material:	Aluminium die casting	Color Rendering Index [CRI]	80
Optical material:	PMMA	Grado IK:	8
Weight:	6 [Kg]	IP Rating:	66
Finish	Black painter powder	Gaskets:	Silicon foam

ELECTRICAL CHARACTERISTICS

Supply voltage [V AC]:	220/240	IEC protection class:	I
Power frequency [Hz]:	50/60	Power factor / COS phi:	0.95
Surge Common Mode [kV]:	10	Inrush current [A/µs]:	90

INSTALLATION

Application:	Outdoor	Max Temperature [C°]:	+50
Min Temperature [C°]:	-20		

CHARACTERISTICS OF LIGHT

MacAdam:	3	Maintaining flow:	LM90 B10 100.000
IPEA	/	Zero light pollution (ULR = 0%):	1

APPROVALS

Glow wire test	850°C 30 Sec	Photobiological risk:	Exempt
CE Mark:	CE EN60598-1 EN60529	EU RoHS Compliance:	YES

OPTIONAL

CODE	DESCRIPTION
1010	Dimmerazione DALI2
5510	Connettore Giunto Spina
1000	Masterconnect driver
1001	Masterconnect Sensor daylight+motionsensor
1002	Masterconnect Switch
4040	Cavo a lunghezza su richiesta
5050	Colore corpo lampada su richiesta

Polar light distribution diagram

